


Features

- Various relays, including LED, test button
- With 2Z, 4Z contact forms
- With various terminal types
- Gilt contact types
- Transparent dust-proof cover, Various mounting types
- Various sockets available

General-Purpose Relay

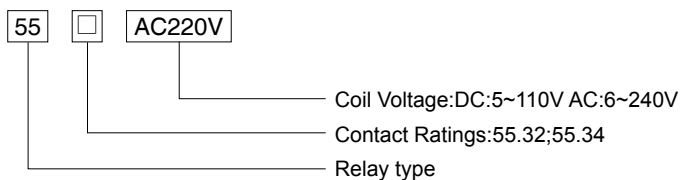

Contact Ratings

Contact Ratings	2Z,2H,2D	4Z,4H,4D
Contact Resistance	100MΩ (1A 6VDC)	
Contact Material	Silver Alloy	
Contact Capacity	5A,7A 240VAC/28VDC	3A,5A 240VAC/28VDC

Specification

Insulation Resistance	500MΩ .500VDC		
Dielectric Strength	BCC	1500VAC	1min
	BOC	1000VAC	1min
	COC	1500VAC	1min
Operate Time	25ms/20ms		
Terminal Type	PCB,Socket		

Coil Ratings

Nominal Coil Power	0.9W/1.2VA
--------------------	------------

Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω: ± 10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω: ± 10%
5	4.8	0.50	28	6	4.80	1.80	12
6	4.8	0.60	40	12	9.60	3.60	42
12	9.6	1.20	160	24	19.2	7.20	168
24	19.2	2.40	640	48	38.4	14.4	675
48	38.4	4.80	2560	110	96.0	36.0	3500
110	88.0	11.0	13400	220/240	176.0	66.0	14000/16500




55.32



55.34

Dimension. Bottom View

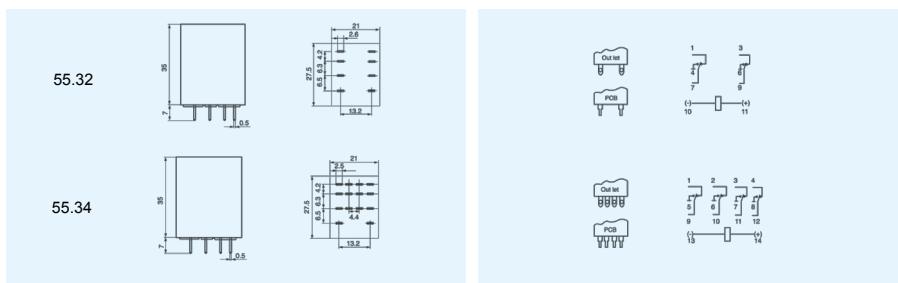

Reference Data

