


Features

- 30A carrying current
- SPST-NO& SPDT
- PCB & PC terminals


PCB Relay

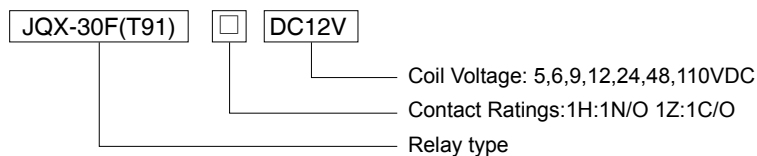

JQX-30F(T91)



JQX-30F(T91)



Contact Ratings

Contact Ratings	1H	1D	1Z
Contact Resistance	100M Ω (1A 6VDC)		
Contact Material	Silver Alloy		
Contact Capacity	1H: 30A 240VAC/28VDC 1D:20A 240VAC/28VDC 1Z: 20A 240VAC/28VDC 40A 240VAC/28VDC		

Specification

Insulation Resistance	100M Ω .500VDC		
Dielectric Strength	BCC	1500V	1min
	BOC	1500V	1min
Operate Time	15ms/10ms		
Terminal Type	PCB		


Coil Ratings

Nominal Coil Power	0.9W
--------------------	------

Coil Versions

Nominal Voltage VDC	Coil Resistance at 20°C $\pm$ 10% (Ω)	Max Operate Voltage (VDC)	Min Release Voltage (VDC)	Max Applicable Voltage (VDC)
	0.9W			
5	28	3.75	0.5	6.5
6	40	4.50	0.6	7.8
9	90	6.75	0.9	11.7
12	160	9.00	1.2	15.6
24	640	18.00	2.4	31.2
48	2560	36.00	4.8	62.4
110	13450	82.50	11.0	143.0

Dimension.Bottom View

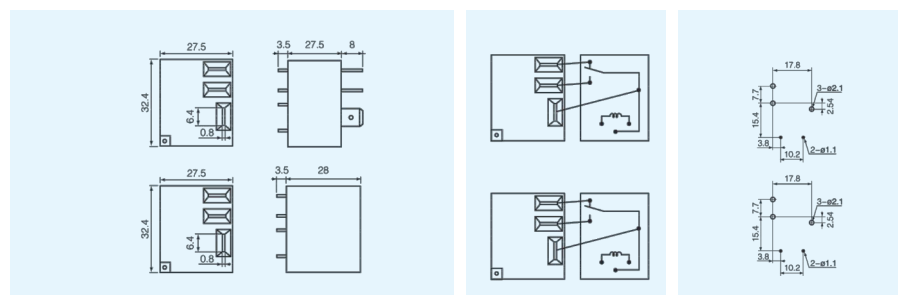

Reference Data

